

VIMEK 404T6

VIMEK®

POWERED BY CAT® AND BOSCH REXROTH



Markets most effective

machine for no branch road thinnings.

Powerful engine at 60 Hp

from CAT and modern hydrostatic transmission from Bosch Rexroth.

Member of our DreamTeam

together with our forwarder Vimek 610.2 for modern, low impact and no branch road thinnings.

80° turning angle

thanks to its dual steering function.

Different crane tip attachments such as

clam shell bucket for ditch cleaning or clearing head for electrical powerlines.



TECHNICAL SPECIFICATION

Engine

CAT 2,2T 44 kW / 2700 rpm

Turning angle

80°

Transmission

Hydrostatic / mechanical

Hydraulic

Flow 120 l/min

Ground clearness

40 cm

Axle width

2,10 m

Width

1,80 m or 2,05 m

Weight

4,400 Kg

Tyres

500/60-22,5 or 405/70-24

Crane

Mowi 2046

– Max reach, 4,60 m

Harvesting head

Keto Forest Silver Supreme

– Max cutting diameter 300 mm

– Weight 300 kg

Computer

Motomit IT

EXTRA EQUIPMENT

Options

Air condition

Crane damping system

Pneumatic chair

Refueling pump for hydraulic oil

Refueling pump for diesel

Radio with Bluetooth

Sun blinds

Diesel engine heating system

Callstart for diesel engine

Roof frame

Full LED lights including roof frame

Half LED lights including roof frame

Sprinkler system

Value bucking

PC with rear camera

Stump treatment system

Grease system for saw chain

Extra accessories

Wheel chains 500/60-22,5 or 405/70-24

Vimek clam shell bucket


Vimek clearing head

Dolly trailer

Caliper

Chain saw holder

Clearing head

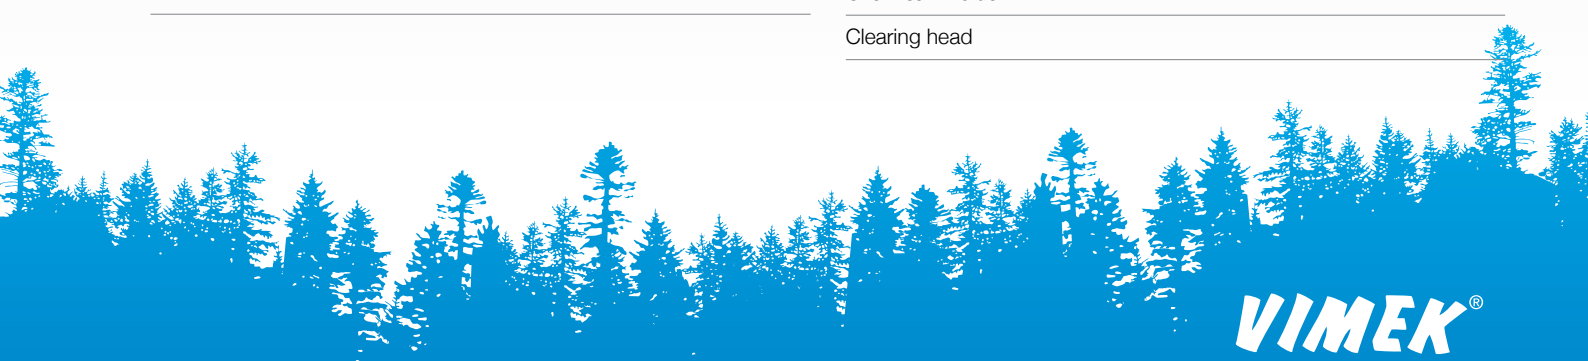

VIMEK®

*The machine on the picture can be extra equipped.

© 2013 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, their respective logos, Caterpillar Yellow, the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and Aug. not be used without permission.

Version 1, Aug. 2015

For more information and to find your nearest retailer, please visit our website

www.vimek.se